


Details

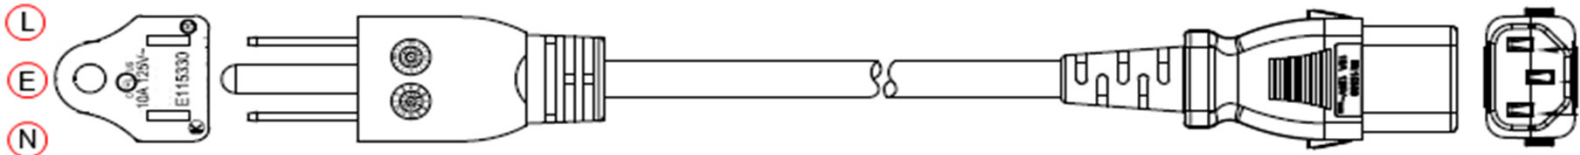

Side A

- 1 *Plug*
- Type: Type B (Nema 5-15)
  - Contacts: N (Neutral)  
E (Earth)  
L (Life)
  - Gender: Male
- 2 *Housing*
- Material: PVC, Molded
  - Orientation: Straight (180°)
  - Color: Black
- 3 *Ratings*
- Current: 10A (max.)
  - Voltage: 125V (max.)

Wire

- 1 *Conductors*
- Type: SVT 3x AWG18
  - Wires: White (N = Nuldraad)  
Green (E = Aarddraad)  
Black (L = Fasedraad)
- 2 *Jacket*
- Material: PVC
  - Color: Black

Side B

- 1 *Connector*
- Type: IEC C13 Lockable
  - Contacts: L (Life)  
E (Earth)  
N (Neutral)
  - Gender: Female
- 2 *Housing*
- Material: Plastic
  - Orientation: Ultrasonic Welded
  - Color: Straight (180°)  
Black
- 3 *Ratings*
- Current: 10A (max.)
  - Voltage: 125V (max.)

Wiring diagram

| Side A | Side B | Color |
|--------|--------|-------|
| N      | N      | White |
| E      | E      | Green |
| L      | L      | Black |

Approvals



Part number Description

|                |                                                                |
|----------------|----------------------------------------------------------------|
| S12A-001-03007 | Power Cord, America (US) - C13 Lockable, 3x AWG18, Black, 1.8m |
| S12A-001-03008 | Power Cord, America (US) - C13 Lockable, 3x AWG18, Black, 2.5m |

Image

