


Details

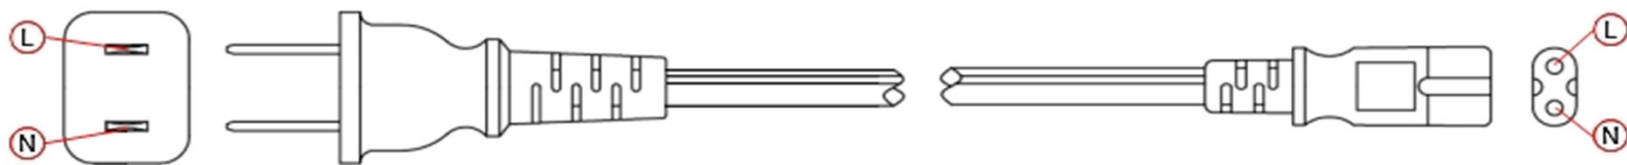

Side A

- 1 *Plug*
- Type: Type A (JIS C 8303)
 - Contacts: L (Life)
N (Neutral)
 - Gender: Male
- 2 *Housing*
- Material: PVC, Molded
 - Orientation: Straight (180°)
 - Color: Black
- 3 *Ratings*
- Current: 7A (max.)
 - Voltage: 125V (max.)

Wire

- 1 *Conductors*
- Type: VFF 2x 0.75mm²
 - Wires: Black (L = Fasedraad)
White (N = Nuldraad)
- 2 *Jacket*
- Material: PVC
 - Color: Black

Side B

- 1 *Connector*
- Type: C7 (IEC 60320-1)
 - Contacts: L (Life)
N (Neutral)
 - Gender: Female
- 2 *Housing*
- Material: PVC, Molded
 - Orientation: Straight (180°)
 - Color: Black
- 3 *Ratings*
- Current: 7A (max.)
 - Voltage: 125V (max.)

Wiring diagram

	Side A	Side B	Color
L		L	Black
N		N	White

Approvals



Part number Description

- S12A-081-33007 Power Cord, Japan - C7, 2x 0.75mm², Black, 1.8m
- S12A-081-33008 Power Cord, Japan - C7, 2x 0.75mm², Black, 2.5m

Image

