


Details

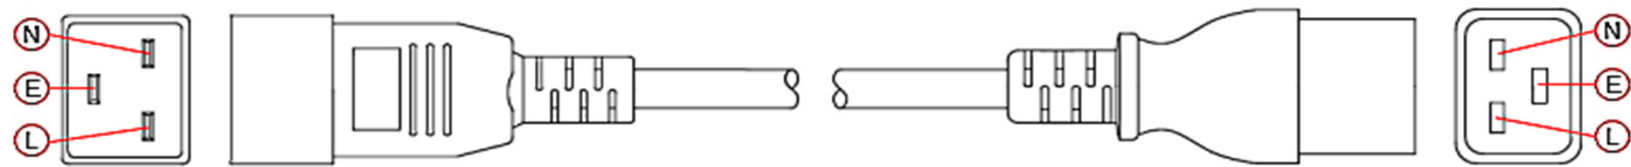

Side A

- 1 *Plug*
- Type: C20 (IEC 60320-1)
 - Contacts: N (Neutral)
E (Earth)
L (Life)
 - Gender: Male
- 2 *Housing*
- Material: PVC, Molded
 - Orientation: Straight (180°)
 - Color: Yellow
- 3 *Ratings*
- Current: 16A (max.)
 - Voltage: 250V (max.)

Wire

- 1 *Conductors*
- Type: H05VV-F 3x 1.50mm²
 - Wires: Brown (L = Life)
Yellow/Green (E = Earth)
Blue (N = Neutral)
- 2 *Jacket*
- Material: PVC
 - Color: Yellow

Side B

- 1 *Connector*
- Type: C19 (IEC 60320-1)
 - Contacts: L (Life)
E (Earth)
N (Neutral)
 - Gender: Female
- 2 *Housing*
- Material: PVC, Molded
 - Orientation: Straight (180°)
 - Color: Yellow
- 3 *Ratings*
- Current: 16A (max.)
 - Voltage: 250V (max.)

Wiring diagram

Side A	Side B	Color
N	N	Brown
E	E	Yellow/Green
L	L	Blue

Approvals



Part number

Description

S12A-000-54402	Power Cord, C20 - C19, 3x 1.50mm ² , Yellow, 0.6m
S12A-000-54405	Power Cord, C20 - C19, 3x 1.50mm ² , Yellow, 1.2m
S12A-000-54407	Power Cord, C20 - C19, 3x 1.50mm ² , Yellow, 1.8m
S12A-000-54409	Power Cord, C20 - C19, 3x 1.50mm ² , Yellow, 3m
S12A-000-54412	Power Cord, C20 - C19, 3x 1.50mm ² , Yellow, 5m

Image

