


Details

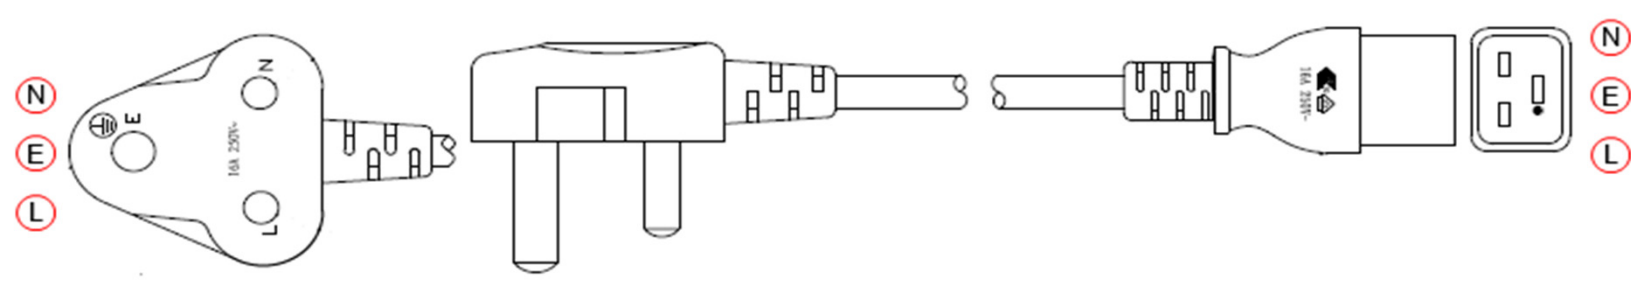

Side A

1 *Plug*

- Type: Type M (SANS 164-1)
- Contacts: N (Neutral)
E (Earth)
L (Life)
- Gender: Male

2 *Housing*

- Material: PVC, Molded
- Orientation: Angled (90°)
- Color: Black

3 *Ratings*

- Current: 16A (max.)
- Voltage: 250V (max.)

Wire

1 *Conductors*

- Type: H05VV-F 3x 1.50mm²
- Wires: Blue(N = Neutral)
Yellow/Green (E = Earth)
Brown (L = Life)

2 *Jacket*

- Material: PVC
- Color: Black

Side B

1 *Connector*

- Type: C19 (IEC 60320-1)
- Contacts: N (Neutral)
E (Earth)
L (Life)
- Gender: Female


2 *Housing*

- Material: PVC, Molded
- Orientation: Straight (180°)
- Color: Black

3 *Ratings*

- Current: 16A (max.)
- Voltage: 250V (max.)

Wiring diagram

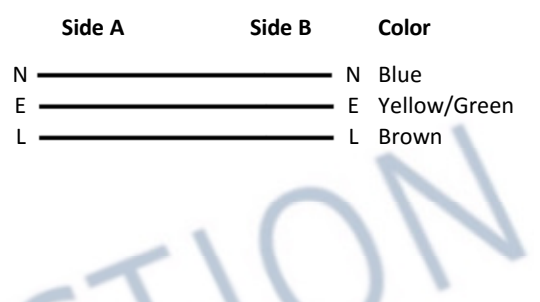

Approvals



Part number Description

S12A-027-05008 Power Cord, South Africa - C19, 3x 1.50mm², Black, 2.5m

Image

